

# POWER SPREADERS

## Flange Spreader

### One-Size-Fits-All



▲  
**HS10K Hydraulic Model**

With the Hydraulic Power-Spreader, HS10K, a hydraulic cylinder replaces the ratchet handle. A standard hand pump powers 1 Power-Spreader, or a pair, with ease. Again, you are supplied with 4535 kg (10,000 lbs) of force and 76.2 mm (3") of gap; ample for gasket replacement or turning of blinds.

Using the manual Power-Spreader, MS10K, simply place the tips between the flange faces and turn the ratcheted handle. The ratcheting action is transformed into 4535 Kg (10,000 lbs.) of spreading force and creates up to 76.2 mm (3") of gap.

### Applications :


- Lift, level and align heavy equipment.
- Remove propellers or impellers.
- Separate manways.
- Change gaskets, turn blinds.

Specification	Metric	Imperial
Weight*	7.7 kg	17 lbs
Length	35.5 cm	14"
Width of feet	114 mm	4.5"
Width of body	101 mm	4"
Tips closed	2.3 mm	0.09"
Tips open	76.2 mm	3"
Tips penetration	38.1 mm	1.5"
Rated force	4,535 kg	10,000 lbs

\* The weight of the HS10K is 7 kg or 15.5 lbs. The length of the HS10K is 33.6 cm or 13.25". All other specification are the same.

### Choose Manual or Hydraulic

- Lightweight. Only 7.7 Kg (17 lbs).
- Jaws open parallel.
- No drift. It stays where you place it.
- Easy one person operation.
- Universal. One-Size-Fits-All.
- 4535 Kg (10,000 lbs) applied force at tips.
- Opens to 76.2 mm (3 inches).

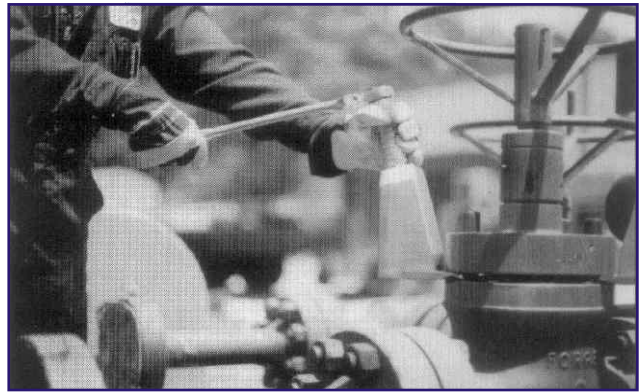

▲  
**MS10K Manual Model**

